



BY JOHNSON CONTROLS

**DSV Model Air Cooled Self  
Contained Indoor Packaged Units  
3-5 Tons  
Preliminary Application Data**



July 28, 2008

PROJECT:	TAG:
----------	------

Gross Cooling Capacity [Btuh]:	37,800*
Design CFM:	1,200
Seasonal Energy Efficiency Ratio:	13.0 SEER**
Net Cooling Capacity [Btuh]:	37,000**
Net Cooling CFM:	1,200
<hr/>	
Evaporator Fan No./Type:	1/CENTRIFUGAL
Diameter x Width [in]:	10x8
Drive:	Adjustable Belt
Motor HP:	0.33
<hr/>	
Condenser Fan No./Type:	1/CENTRIFUGAL
Diameter x Width [in]:	12x12
Drive:	Adjustable Belt
Motor HP :	1.0

Evaporator Coil Face Area:	5.16 [sq ft]
Rows/FPI:	3 / 10
Refrigerant Control:	TX Valve
<hr/>	
Condenser Coil Face Area:	7.03 [sq ft]
Rows/FPI:	3 / 12
<hr/>	
Compressor No./Type:	1/Scroll
Refrigerant Circuits:	1/ Independent
<hr/>	
Refrigerant:	<b>R-410A</b>
<hr/>	
Filters - Qty./Size:	2/18x24x2
<hr/>	
Operating Weight [lbs.]:	610
Shipping Weight [lbs.]:	650
<hr/>	
Condensate Connection:	3 / 4 NPT

\*Cooling performance is rated at 95°F ambient, 80°F entering dry bulb, 67°F wet bulb and CFM listed. Gross capacity does not include the effect of fan motor heat.

\*\*Rated in accordance with ARI Standard 210/240-2006

**EVAPORATOR FAN PERFORMANCE**

MODEL #	SUPPLY CFM	EXTERNAL STATIC PRESSURE - Inches W.C.									
		0.2		0.4		0.6		0.8		1.0	
		RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
DSV036A	1000	605	0.11	732	0.16	839	0.19	941	0.26	1051	0.31
	1200	675	0.17	788	0.23	890	0.29	988	0.34	-	-
	1400	749	0.26	849	0.32	-	-	-	-	-	-

NOTE:

- At high evaporator air flows, and wet bulb conditions, condensate carry-over may occur. Adjust airflow downward as necessary.
- Values include pressure drop from wet coil and clean filters.

**CONDENSER FAN PERFORMANCE**

MODEL #	OUTDOOR CFM	EXTERNAL STATIC PRESSURE - Inches W.C.									
		0.2		0.4		0.6		0.8		1.0	
		RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
DSV036A	2200	622	0.39	720	0.50	802	0.60	961	0.69	953	0.79

**ELECTRICAL DATA**

MODEL #	VOLTAGE	COMPRESSOR				CONDENSER FAN		MIN. CCT. AMPACITY	"MOP" Max Overcurrent Protection
		QTY	RLA	LRA	HP	FLA			
DSV036A1	208-230/1/60	1	@	14.1	77.0	1.00	6.7	27.53	40
DSV036A2	208-230/3/60	1	@	9.0	71.0	1.00	3.0	16.05	25
DSV036A4	460/3/60	1	@	5.6	38.0	1.00	1.4	9.20	15
DSV036A5	575/3/60	1	@	3.8	36.5	1.00	1.1	6.45	15

Johnson Controls maintains a continuous product improvement policy, therefore specifications are subject to change without notice.

	DESCRIPTION:  <b>DSV036 VERTICAL AIR-COOLED SELF-CONTAINED AIR CONDITIONER UNIT SPECIFICATIONS</b>	Form 145.13-PA1 (1108)

**GENERAL**

All models 3-5 tons ship as factory-charged unitized packages. All units may be field split and installed as separate modules to suit on-site requirements. All packages are designed for free standing mounting on the floor, or on a field fabricated structural steel stand.

**CABINET**

All cabinets are completely constructed of heavy gauge galvanized steel. The entire unit interior (both evaporator and condensing section) is insulated with 1/2" thick, 2-lb density insulation. Service panels are equipped with lifting handles for ease of removal and handling. Duct flanges for condenser discharge, condenser intake, and evaporator discharges are provided with the unit for field installation. Duct flange on evaporator return is incorporated into the filter frame.

**REFRIGERANT CIRCUITS**

All models utilize "Scroll" type, R-410A, hermetic compressors. Compressors are mounted on rubber isolators to minimize vibration transmission. Internal overload protection is provided. External high pressure and low pressure cut-out switches are included in each compressor control circuit. Crankcase heaters are standard on all models. The 3-5 ton units have a single refrigeration circuit.

**EVAPORATOR AND CONDENSER COILS**

The evaporator and condenser coils are constructed of internally enhanced copper tubes mechanically bonded to rippled aluminum plate fins. Both coils are employed in a draw-thru configuration. Large evaporator coil face area minimizes potential water blow-off.

**INDOOR/OUTDOOR FANS**

Forward curved, double inlet and double width centrifugal blowers are used for both evaporator and condenser air movement. Blower wheels are fabricated of galvanized steel. Blowers employ solid steel shafts, supported in permanently lubricated ball bearings. All blowers are belt driven. Variable-pitch motor sheaves allow for field adjustment of blower rpm. Motor shall be 1800 RPM, open drip proof design. Three-phase motors are provided with external manual reset overload protection. Single-phase motors feature auto reset internal overloads.

**ELECTRICAL/CONTROLS**

All units are completely factory wired with all necessary controls. A manual reset circuit is also provided on each compressor control circuit in the event of high/low pressure cut-out. A 24 volt control circuit, with oversize transformer, is provided for field connection.

**FILTERS**

All models are shipped with 2-inch thick medium-efficiency throwaway filters factory installed. Filter rack is external to the cabinet (shipped loose).

**FACTORY INSTALLED OPTIONS**


**Corrosion Resistant Coatings.** Condenser coil shall receive a 1-mil thickness of a cathodic epoxy type electro-deposition coating, applied in a multiple dip and bake process.

**Anti-Short Cycle Timer.** Time delay relay will be provided for each compressor circuit. Compressor will be locked out for 5 minutes when thermostat contact opens, or there is a momentary power outage.


**FIELD INSTALLED OPTIONS**

**Low Ambient Control.** Head pressure control damper kit will allow unit operation down to 0 F ambient. Damper assembly mounts on condenser air intake. The kit includes damper actuator and low pressure switch bypass timer(s).

*Johnson Controls maintains a continuous product improvement policy; therefore specifications are subject to change without notice.*

	DESCRIPTION	Form 145.13-PA1 (1108)
	MECHANICAL SPECIFICATION R-410A DSV SERIES VERTICAL INDOOR AIR CONDITIONING UNITS	DATE: November 2008

### DSV036 DIMENSIONAL DATA

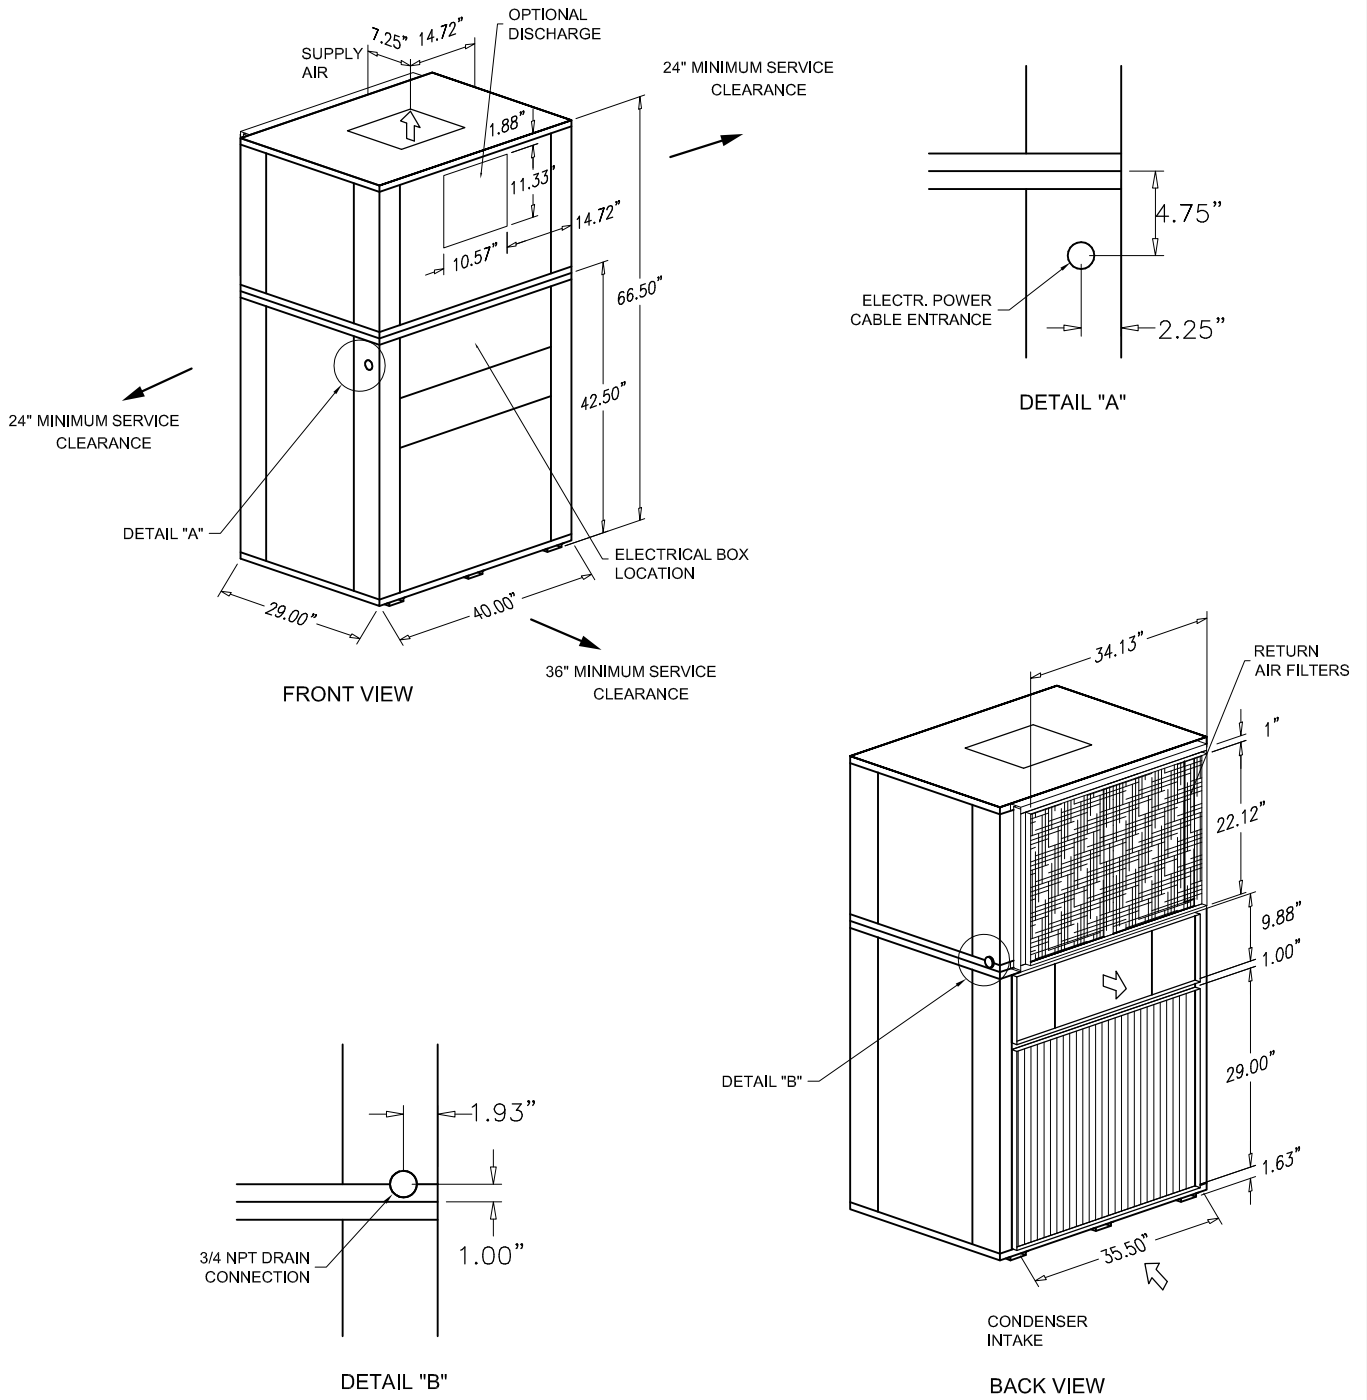

DESCRIPTION:  
**DSV036 VERTICAL AIR-COOLED  
 SELF-CONTAINED AIR CONDITIONERS  
 SUBMITTAL DIMENSIONS**

Form 145.13-PA1 (1108)

DATE:  
**November 2008**

PROJECT:	TAG:
----------	------

Gross Cooling Capacity [Btuh]: 50,100* Design CFM: 1,600  Seasonal Energy Efficiency Ratio: 13.0 SEER** Net Cooling Capacity [Btuh]: 49,000** Net Cooling CFM: 1,600
Evaporator Fan No./Type: 1/CENTRIFUGAL Diameter x Width [in]: 10x10 Drive: Adjustable Belt Motor HP: 0.5
Condenser Fan No./Type: 1/CENTRIFUGAL Diameter x Width [in]: 12x15 Drive: Adjustable Belt Motor HP : 1.0

Evaporator Coil Face Area: 5.46 [sq ft] Rows/FPI: 3 / 12 Refrigerant Control: TX Valve
Condenser Coil Face Area: 7.94 [sq ft] Rows/FPI: 4 / 14
Compressor No./Type: 1/Scroll Refrigerant Circuits: 1/ Independent
Refrigerant: <b>R-410A</b>
Filters - Qty./Size: 2/20x24x2
Operating Weight [lbs.]: 670 Shipping Weight [lbs.]: 715
Condensate Connection: 3 / 4 NPT

\*Cooling performance is rated at 95°F ambient, 80°F entering dry bulb, 67°F wet bulb and CFM listed. Gross capacity does not include the effect of fan motor heat.

\*\*Rated in accordance with ARI Standard 210/240-2006

**EVAPORATOR FAN PERFORMANCE**

MODEL #	SUPPLY CFM	EXTERNAL STATIC PRESSURE - Inches W.C.									
		0.2		0.4		0.6		0.8		1.0	
		RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
DSV048A	1450	735	0.24	845	0.30	950	0.38	1037	0.45	1134	0.52
	1600	788	0.31	889	0.38	987	0.46	1076	0.55	-	-
	1800	870	0.43	962	0.51	-	-	-	-	-	-

NOTE:

1. At high evaporator air flows, and wet bulb conditions, condensate carry-over may occur. Adjust airflow downward as necessary.
2. Values include pressure drop from wet coil and clean filters.

**CONDENSER FAN PERFORMANCE**

MODEL #	OUTDOOR CFM	EXTERNAL STATIC PRESSURE - Inches W.C.									
		0.2		0.4		0.6		0.8		1.0	
		RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
DSV048A	2600	719	0.61	800	0.71	870	0.85	940	0.98	-	-

**ELECTRICAL DATA**

MODEL #	VOLTAGE	COMPRESSOR			EVAPORATOR FAN		CONDENSER FAN		MIN. CCT. AMPACITY	"MOP" Max Overcurrent Protection	
		QTY	RLA	LRA	HP	FLA	HP	FLA			
DSV048A1	208-230/1/60	1	@	19.9	109.0	0.50	4.4	1.00	6.7	35.98	50
DSV048A2	208-230/3/60	1	@	13.1	83.1	0.50	2.1	1.00	3.0	21.48	30
DSV048A4	460/3/60	1	@	6.1	41.0	0.50	1.0	1.00	1.4	10.03	15
DSV048A5	575/3/60	1	@	5.0	34.0	0.50	0.8	1.00	1.1	8.15	15

*Johnson Controls maintains a continuous product improvement policy, therefore specifications are subject to change without notice.*

	DESCRIPTION:  <b>DSV048A VERTICAL AIR-COOLED SELF-CONTAINED AIR CONDITIONER UNIT SPECIFICATIONS</b>	Form 145.13-PA2 (1108)

**GENERAL**

All models 3-5 tons ship as factory-charged unitized packages. All units may be field split and installed as separate modules to suit on-site requirements. All packages are designed for free standing mounting on the floor, or on a field fabricated structural steel stand.

**CABINET**

All cabinets are completely constructed of heavy gauge galvanized steel. The entire unit interior (both evaporator and condensing section) is insulated with 1/2" thick, 2-lb density insulation. Service panels are equipped with lifting handles for ease of removal and handling. Duct flanges for condenser discharge, condenser intake, and evaporator discharges are provided with the unit for field installation. Duct flange on evaporator return is incorporated into the filter frame.

**REFRIGERANT CIRCUITS**

All models utilize "Scroll" type, R-410A, hermetic compressors. Compressors are mounted on rubber isolators to minimize vibration transmission. Internal overload protection is provided. External high pressure and low pressure cut-out switches are included in each compressor control circuit. Crankcase heaters are standard on all models. The 3-5 ton units have a single refrigeration circuit.

**EVAPORATOR AND CONDENSER COILS**

The evaporator and condenser coils are constructed of internally enhanced copper tubes mechanically bonded to rippled aluminum plate fins. Both coils are employed in a draw-thru configuration. Large evaporator coil face area minimizes potential water blow-off.

**INDOOR/OUTDOOR FANS**

Forward curved, double inlet and double width centrifugal blowers are used for both evaporator and condenser air movement. Blower wheels are fabricated of galvanized steel. Blowers employ solid steel shafts, supported in permanently lubricated ball bearings. All blowers are belt driven. Variable-pitch motor sheaves allow for field adjustment of blower rpm. Motor shall be 1800 RPM, open drip proof design. Three-phase motors are provided with external manual reset overload protection. Single-phase motors feature auto reset internal overloads.

**ELECTRICAL/CONTROLS**

All units are completely factory wired with all necessary controls. A manual reset circuit is also provided on each compressor control circuit in the event of high/low pressure cut-out. A 24 volt control circuit, with oversize transformer, is provided for field connection.

**FILTERS**

All models are shipped with 2-inch thick medium-efficiency throwaway filters factory installed. Filter rack is external to the cabinet (shipped loose).

**FACTORY INSTALLED OPTIONS**


**Corrosion Resistant Coatings.** Condenser coil shall receive a 1-mil thickness of a cathodic epoxy type electro-deposition coating, applied in a multiple dip and bake process.

**Anti-Short Cycle Timer.** Time delay relay will be provided for each compressor circuit. Compressor will be locked out for 5 minutes when thermostat contact opens, or there is a momentary power outage.


**FIELD INSTALLED OPTIONS**

**Low Ambient Control.** Head pressure control damper kit will allow unit operation down to 0 F ambient. Damper assembly mounts on condenser air intake. The kit includes damper actuator and low pressure switch bypass timer(s).

Johnson Controls maintains a continuous product improvement policy; therefore specifications are subject to change without notice.

	DESCRIPTION MECHANICAL SPECIFICATION R-410A DSV SERIES VERTICAL INDOOR AIR CONDITIONING UNITS	Form 145.13-PA2 (1108)
		DATE: November 2008

### DSV048 & DSV060 DIMENSIONAL DATA

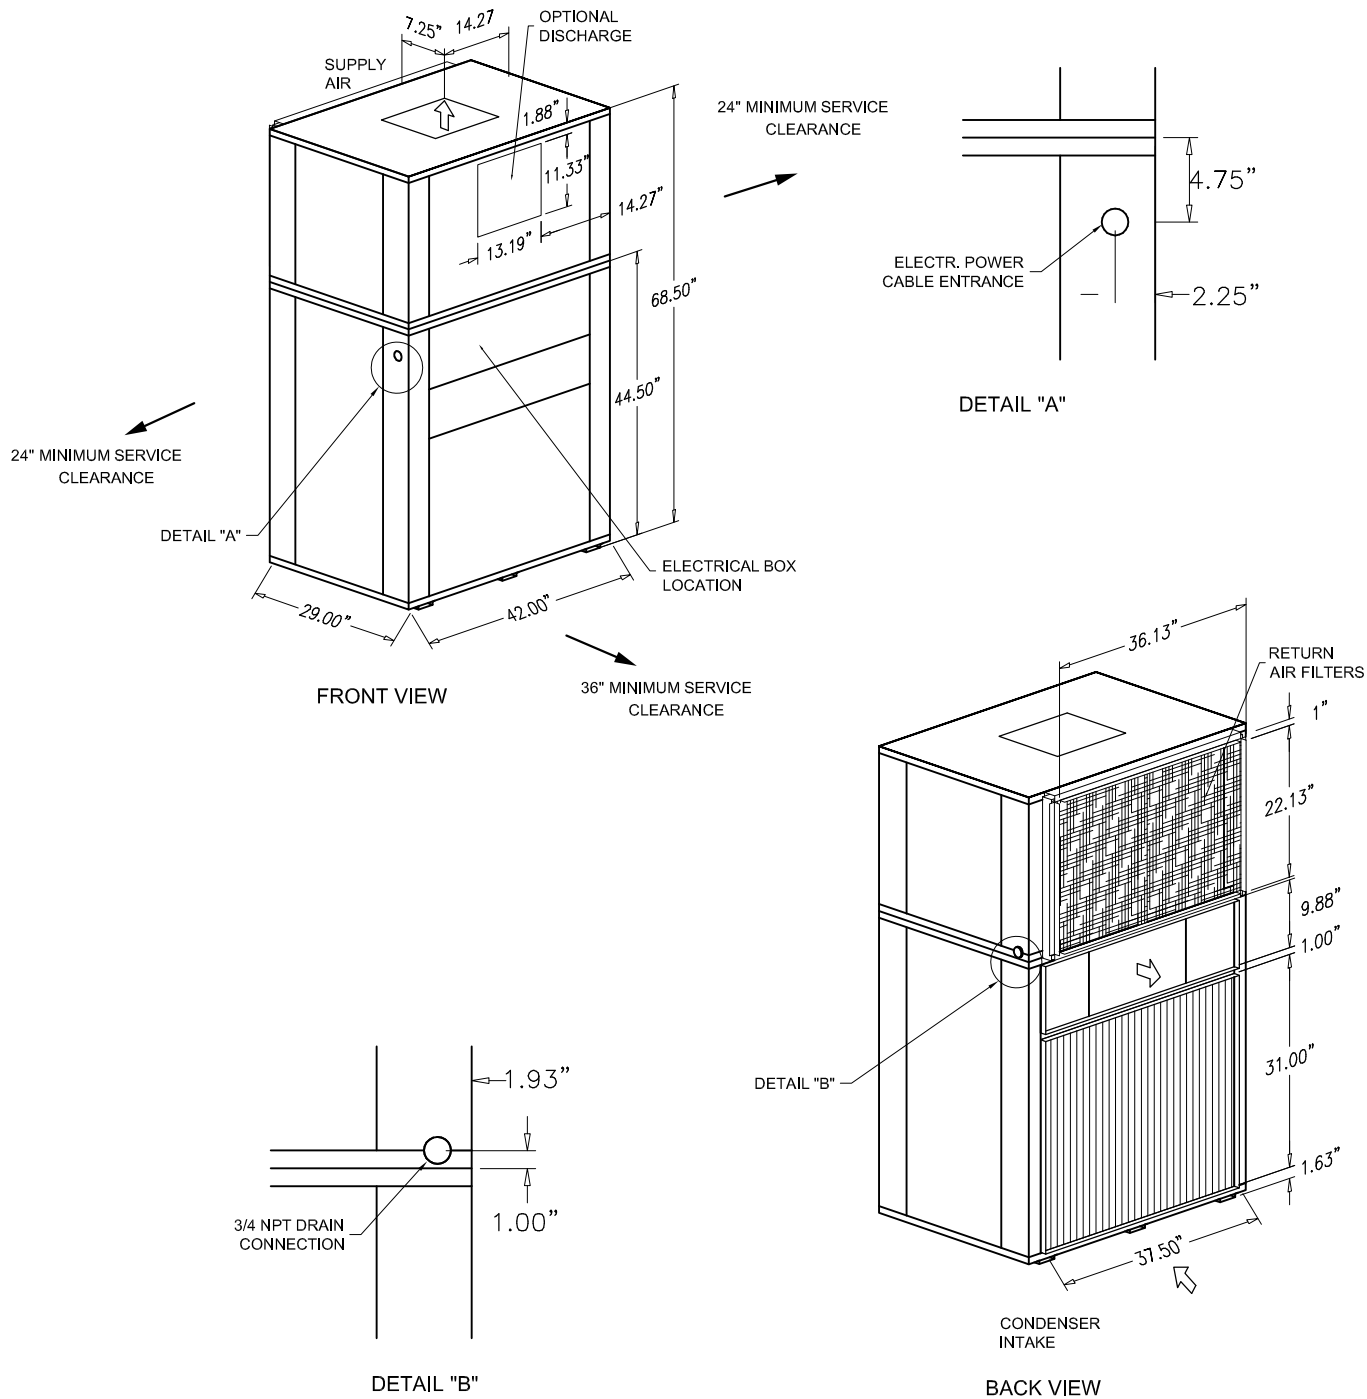

DESCRIPTION:  
**DSV048/060 VERTICAL AIR-COOLED  
 SELF-CONTAINED AIR CONDITIONERS  
 SUBMITTAL DIMENSIONS**

Form 145.13-PA2 (1108)

DATE:  
**November 2008**

PROJECT:	TAG:
----------	------

Gross Cooling Capacity [Btuh]: 62,900* Design CFM: 2,000  Seasonal Energy Efficiency Ratio: 13.0 SEER** Net Cooling Capacity [Btuh]: 61,000** Net Cooling CFM: 2,000	Evaporator Fan No./Type: 1/CENTRIFUGAL Diameter x Width [in]: 10x10 Drive: Adjustable Belt Motor HP: 1.0
Condenser Fan No./Type: 1/CENTRIFUGAL Diameter x Width [in]: 12x15 Drive: Adjustable Belt Motor HP: 1.5	

Evaporator Coil Face Area: 5.46 [sq ft] Rows/FPI: 3 / 12 Refrigerant Control: TX Valve	Condenser Coil Face Area: 7.94 [sq ft] Rows/FPI: 4 / 14
Compressor No./Type: 1/Scroll Refrigerant Circuits: 1/ Independent	
Refrigerant: <b>R-410A</b>	
Filters - Qty./Size: 2/20x24x2	
Operating Weight [lbs.]: 720 Shipping Weight [lbs.]: 765	
Condensate Connection: 3 / 4 NPT	

\*Cooling performance is rated at 95°F ambient, 80°F entering dry bulb, 67°F wet bulb and CFM listed. Gross capacity does not include the effect of fan motor heat.  
 \*\*Rated in accordance with ARI Standard 210/240-2006

**EVAPORATOR FAN PERFORMANCE**

MODEL #	SUPPLY CFM	EXTERNAL STATIC PRESSURE - Inches W.C.															
		0.2		0.4		0.6		0.8		1.0		1.2		1.4		1.6	
		RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
DSV060A	1800	860	0.41	945	0.50	1039	0.58	1130	0.67	1208	0.76	1280	0.83	1359	0.85	1435	0.96
	2000	926	0.55	1010	0.63	1098	0.72	1178	0.81	1250	0.90	1325	0.99	-	-	-	-
	2200	1007	0.72	1085	0.80	1160	0.90	1230	0.99	-	-	-	-	-	-	-	-

**NOTE:**

- At high evaporator air flows, and wet bulb conditions, condensate carry-over may occur. Adjust airflow downward as necessary.
- Values include pressure drop from wet coil and clean filters.

**CONDENSER FAN PERFORMANCE**

MODEL #	OUTDOOR CFM	EXTERNAL STATIC PRESSURE - Inches W.C.									
		0.2		0.4		0.6		0.8		1.0	
		RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
DSV060A	3000	886	0.87	838	0.99	920	1.12	1002	1.29	1055	1.47

**ELECTRICAL DATA**

MODEL #	VOLTAGE	COMPRESSOR			EVAPORATOR FAN		CONDENSER FAN		MIN. CCT. AMPACITY	"MOP" Max Overcurrent Protection
		QTY	RLA	LRA	HP	FLA	HP	FLA		
DSV060A2	208-230/3/60	1	@ 16.0	110.0	1.00	3.2	1.50	4.3	27.50	40
DSV060A4	460/3/60	1	@ 7.8	52.0	1.00	1.5	1.50	2.1	13.35	20
DSV060A5	575/3/60	1	@ 5.7	38.9	1.00	1.2	1.50	1.7	10.03	15

Johnson Controls maintains a continuous product improvement policy, therefore specifications are subject to change without notice.

	DESCRIPTION:  <b>DSV060A VERTICAL AIR-COOLED SELF-CONTAINED AIR CONDITIONER UNIT SPECIFICATIONS</b>	Form 145.13-PA3 (1108)

**GENERAL**

All models 3-5 tons ship as factory-charged unitized packages. All units may be field split and installed as separate modules to suit on-site requirements. All packages are designed for free standing mounting on the floor, or on a field fabricated structural steel stand.

**CABINET**

All cabinets are completely constructed of heavy gauge galvanized steel. The entire unit interior (both evaporator and condensing section) is insulated with 1/2" thick, 2-lb density insulation. Service panels are equipped with lifting handles for ease of removal and handling. Duct flanges for condenser discharge, condenser intake, and evaporator discharges are provided with the unit for field installation. Duct flange on evaporator return is incorporated into the filter frame.

**REFRIGERANT CIRCUITS**

All models utilize "Scroll" type, R-410A, hermetic compressors. Compressors are mounted on rubber isolators to minimize vibration transmission. Internal overload protection is provided. External high pressure and low pressure cut-out switches are included in each compressor control circuit. Crankcase heaters are standard on all models. The 3-5 ton units have a single refrigeration circuit.

**EVAPORATOR AND CONDENSER COILS**

The evaporator and condenser coils are constructed of internally enhanced copper tubes mechanically bonded to rippled aluminum plate fins. Both coils are employed in a draw-thru configuration. Large evaporator coil face area minimizes potential water blow-off.

**INDOOR/OUTDOOR FANS**

Forward curved, double inlet and double width centrifugal blowers are used for both evaporator and condenser air movement. Blower wheels are fabricated of galvanized steel. Blowers employ solid steel shafts, supported in permanently lubricated ball bearings. All blowers are belt driven. Variable-pitch motor sheaves allow for field adjustment of blower rpm. Motor shall be 1800 RPM, open drip proof design. Three-phase motors are provided with external manual reset overload protection. Single-phase motors feature auto reset internal overloads.

**ELECTRICAL/CONTROLS**

All units are completely factory wired with all necessary controls. A manual reset circuit is also provided on each compressor control circuit in the event of high/low pressure cut-out. A 24 volt control circuit, with oversize transformer, is provided for field connection.

**FILTERS**

All models are shipped with 2-inch thick medium-efficiency throwaway filters factory installed. Filter rack is external to the cabinet (shipped loose).

**FACTORY INSTALLED OPTIONS**


**Corrosion Resistant Coatings.** Condenser coil shall receive a 1-mil thickness of a cathodic epoxy type electro-deposition coating, applied in a multiple dip and bake process.

**Anti-Short Cycle Timer.** Time delay relay will be provided for each compressor circuit. Compressor will be locked out for 5 minutes when thermostat contact opens, or there is a momentary power outage.

**FIELD INSTALLED OPTIONS**

**Low Ambient Control.** Head pressure control damper kit will allow unit operation down to 0 F ambient. Damper assembly mounts on condenser air intake. The kit includes damper actuator and low pressure switch bypass timer(s).

Johnson Controls maintains a continuous product improvement policy; therefore specifications are subject to change without notice.

	DESCRIPTION MECHANICAL SPECIFICATION R-410A DSV SERIES VERTICAL INDOOR AIR CONDITIONING UNITS	Form 145.13-PA3 (1108)
		DATE: November 2008

